

FIXING SYSTEMS


Clever fixings as a system solution for
different grating designs and applications

Fixing systems

Gratings represent safe construction elements when fixed according to regulations. To keep danger at bay or prevent theft, you should therefore always secure gratings to prevent them from moving and – in certain cases to prevent them from lifting. Afterwards, check installed fixings regularly to ensure they are in good condition and have a secure hold.


We offer our smart fixings as a system solution for different grating designs and applications. In principle, however, all fixings are also available as individual parts, meaning you can put together your own customised fastening.

Clamp fixing




**Clamp fixing
no. 1**

With top plate
for mesh 30x30 mm
and 40x40 mm




**Clamp fixing
no. 2**

With top clamp
for mesh 30x30 mm
40x40 mm and 30x20 mm

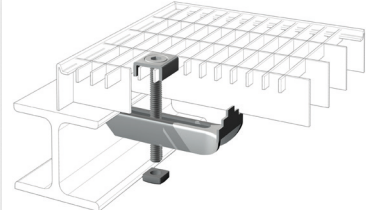


**Clamp fixing
no. 3**

With top clamp
for mesh 30x10 mm
40x10 mm and 30x14 mm



**Clamp fixing
no. 4**


For almost all meshes



**Clamp fixing
no. 5**


For almost all meshes

Screw connection




Welded hole plate

Design and positioning upon technical agreement



Self-drilling screw no. 46


For mesh 30x30 mm 30x10 mm and 40x10 mm



Stirrup clamp with self-drilling screw


Stirrup clamp no. 39
Self-drilling screw no. 47
for mesh $\geq 20 \times 20$ mm

Connector



Double clamp no. 11


With top plate or top clamp for mesh 30x30 mm and 40x40 mm

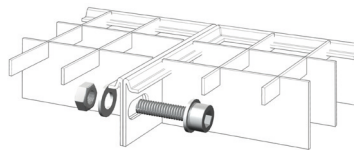

Grating connector no. 12


To connect two gratings

Safety devices



Safety chain no. 14


For almost all meshes



Socket spanner lock


For mesh 30x30 mm

Fixing systems for racking




Fixing hook no. 18 a/b

For fixing in pallet racks,
for almost all meshes



Hook fixing no. 19

For the fixing of inlaid
gratings in pallet racks
with box profiles



Cantilever fixing no. 24

For fixing in cantilever racks,
for almost all meshes,
minimum grating height
30 mm